

DS-D5C75RB/B

75-inch Interactive Flat Panel



The Hikvision Interactive Flat Panel is a kind of newly developed intelligent teaching assistance product which integrates with the latest technologies of touch control, HD display, video processing, network communication, interactive control, sound control. It can be widely applied to the classroom, online teaching, training center, etc.

- UHD 4K display with resolution of 3840 × 2160.
- Anti-glare and anti-blocking design to ensure smooth interaction.
- Dual systems of Android and Windows (Optional) saving cost and easy to use, video conference software are recommended to run under Windows system.
- Quick response, at most 45-points touch control and smooth writing experience.
- Built-in network switch module saves a network switch.
- All-in-one design with tempered glass and intelligent temperature control, making it environmental-friendly and safety-guaranteed, support blue light protection.

▪ Specification


| Model | | DS-D5C75RB/B |
|-------------------------------|----------------------|---|
| Product Model | Product Model | DS-D5C75RB/B |
| Panel | Glass Thickness | 3.2 mm |
| | Glass Bonding Method | Zero Lamination |
| Display | Screen Size | 75 inch |
| | Backlight | DLED |
| | Pixel Pitch | 0.14325(H) × 0.42975(V) mm |
| | Resolution | 3840 × 2160 @60 Hz |
| | Brightness | 400 cd/m ² with Brightness sensor |
| | Color Depth | 10 bit |
| | Contrast Ratio | 5000 : 1 |
| | Response Time | 6 ms |
| | Color Gamut | 72% NTSC |
| | Refresh Rate | 60 Hz |
| | Viewing Angle | 178°(H)/178°(V) |
| Optical | Aspect Ratio | 16 : 9 |
| Built-in System | Operation System | Android 13.0 |
| | Processor | Quad-core Cortex-A76 × 4 (2.4 GHz) and quad-core Cortex-A55 × 4 (1.8 GHz) |
| | Memory | 8 GB |
| | Built-in Storage | 128 GB |
| | Panel Type | VA |
| | HDCP Version | 2.3 |
| | Touch Resolution | 32768 × 32768 |
| Touch | Type | Infrared Touch Screen |
| | Touch Point | 45 point multi-touch |
| | Touch Response Time | < 8 ms |
| | Touch Precision | ± 1 mm (≥ 90% touching area) |
| Processing Performance | Display Color | 1.07G |
| Internal Function | Loudspeaker | Built-in 2 ×15 W+25 W loudspeaker; |
| | Bluetooth | Built-in BLE (Bluetooth Low Energy) module supports Bluetooth 5.1 |
| | Image | Support 3D digital noise reduction, face detection, automatic white balance, automatic purple |

| | | |
|----------------------------|--------------------------------|--|
| | Processing Technology | edge removal, automatic defogging; support shadow correction and distortion correction for lens. |
| | Audio Processing Technology | Support dereverberation, adaptive noise reduction, adaptive non-stationary noise reduction, adaptive echo cancellation, automatic gain control, automatic electrical level control, sound source localization, speech dynamic detection, digital beam forming, speech detection. |
| Interface | Video & Audio Input | HDMI In 2.0 × 3, VGA In × 1, DP In 1.2 × 1, Audio In × 1 |
| | Video & audio output | HDMI Out 2.0 × 1, Audio Out × 1, SPDIF Out × 1 |
| | Control interface | TOUCH-USB 3.0 × 3, RS232 × 1 |
| | Network Interface | LAN (1000 Mbps) × 2 WIFI AP&Station, 2.4 G/5 G IEEE 802.11 a/b/g/n/ac 2 × 2 MIMO (2.4 GHz and 5 GHz) authentication protocols WEP, WPA, WPA2, PSK and 802.1X EAP |
| | Data Transmission Interface | USB 3.0 × 4, USB 2.0 × 1, Type-C × 2 (Type-C supports USB 2.0, DP 1.2, and charging functions; side charging 15 W, front charging 65 W) |
| Power | Standby Consumption | ≤ 0.5 W |
| | Average Consumption | < 170W |
| Working Environment | Working Temperature | 0 °C to 40 °C (32 °F to 104°F) |
| | Working Humidity | 10%~90% RH |
| General | VESA | 800 mm × 400 mm (4 × M8-25 mm) |
| | Power Supply | 100 to 240 VAC, 50/60 Hz |
| | Product dimensions | 1713.2 mm × 1034.5 mm × 82.5 mm |
| | Accessory | Wall mount bracket, hook, user manual, touch writing pen, packing list, 3M touch USB cable, 3M HDMI cable (2.0), 1.5m power cable (European standard), Bluetooth remote control. |
| | Package Dimensions (W × H × D) | 1937 mm × 264 mm × 1222 mm |
| | Net Weight | 51.23 kg |
| | Gross Weight | 67.62 kg |
| | NFC | Support screen mirroring by Android phones. |
| Camera | Pixel | 8 MP (48MP for photos) |
| | Camera Function | Support intelligent switching between Android system, OPS, and PC. |
| | Field Angle | 120°(diagonal), 110°(horizontal), 75°(vertical) |
| | Distortion | ≤ 2.5% |
| | Camera Resolution | Up to 4K |



| | | |
|-------------------|-------------------|---|
| | Ratio | |
| Microphone | Specification | Omni-directional 8-array layout |
| | Mic Function | Echo reduction and smart noise-cancellation |
| | Voice Distance | 12 m |
| | Sampling Rate | 32 K |
| | Mic Sampling Rate | 16 bit |

▪ Physical Interface

| Interface | Description | Interface | Description |
|----------------|--------------------------------|----------------|------------------------------------|
| 1.SPdif | SPDIF interface | 2.Line OUT | Audio output interface |
| 3.Line IN | Audio input interface | 4.VGA IN | Video devices connection interface |
| 5.TYPE-C | Type-C interface | 6.DP IN | Display input interface |
| 7.TOUCH-USB 2 | Peripheral touch interface | 8.HDMI IN 2 | HDMI 2 input interface |
| 9.TOUCH-USB | Peripheral touch interface | 10.HDMI IN 1 | HDMI 1 input interface |
| 11.USB | USB interface | 12.MULTI-USB 2 | Multi-functional USB interface |
| 13.MULTI-USB 1 | Multi-functional USB interface | 14.HDMI OUT | HDMI output interface |

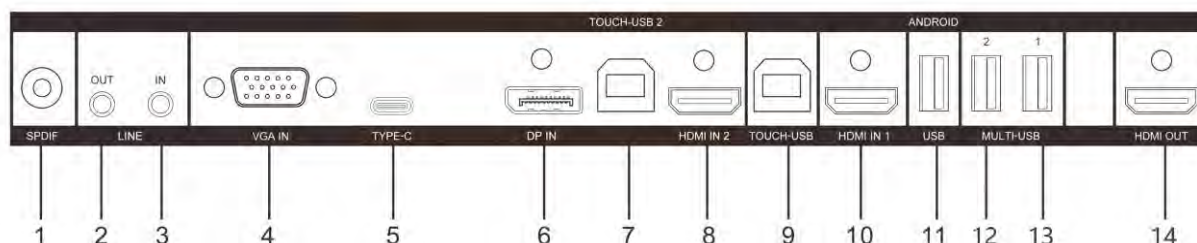

▪ Installation

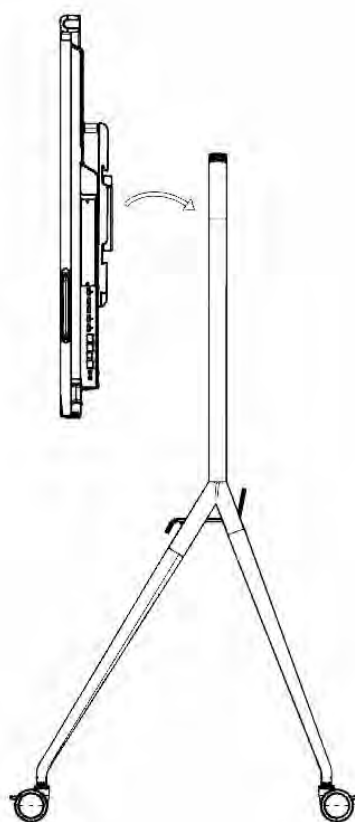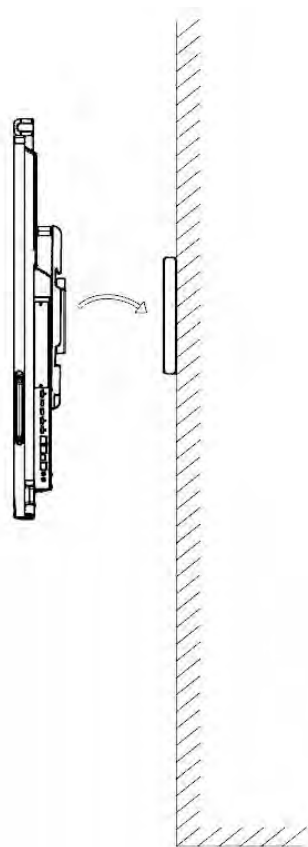



▪ Available Model

DS-D5C75RB/B

ID75HZA3B1/C/NOD

▪ Dimension

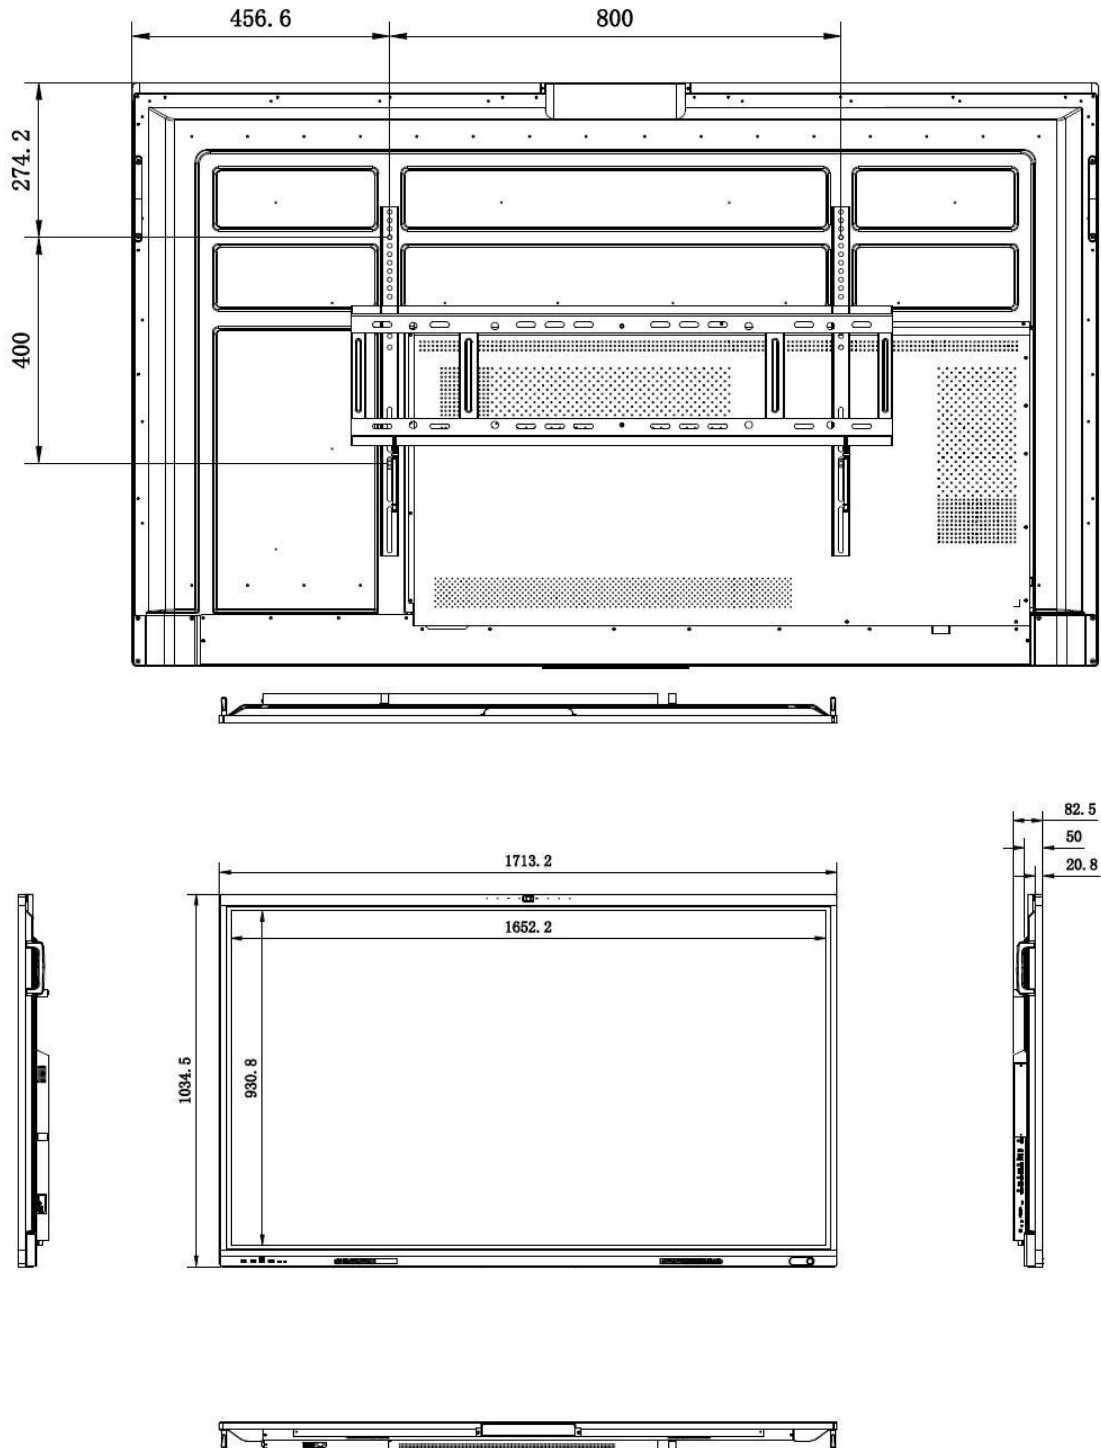

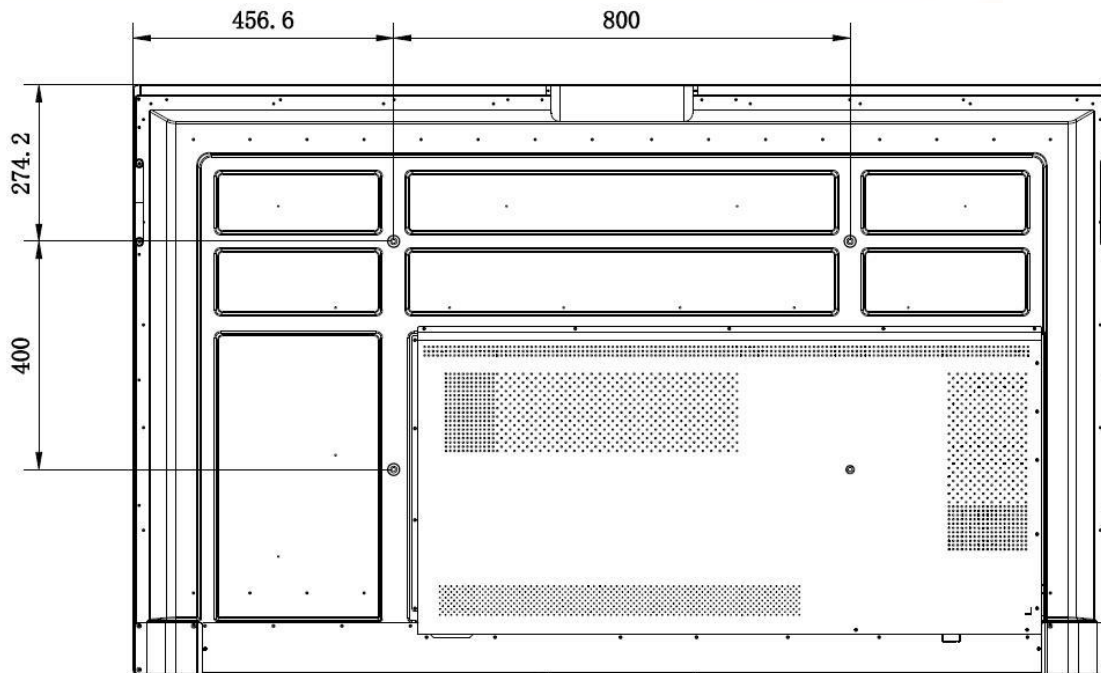

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

